

G-Energy Moto 4T Performance 10W-40



Engine oil



Four-stroke motorcycles and motor vehicles



Compatible with "wet" clutches



Fully synthetic base (PAO)



Oxidation stability at active driving



Excellent anti-wear protection



Durable oil film throughout whole interval

G-Energy Moto 4T Performance 10W-40 — fully synthetic engine oil, designed on the PAO base for maximum engine protection of motorcycles and other motor vehicles, including those with integrated gearbox (wet clutches). Oil withstands extreme thermal loads, including those in sports competitions, providing reliable protection of engine, gearbox and clutches in any operating modes.

Applications



- Four-stroke engines of all types of motorcycles, including those with integrated gearbox and wet clutches
- Racing motorcycles and motor vehicles of various classes, intended for racing and qualifying runs
- Gasoline four-stroke engines of various motor equipment (scooters, quad bikes, etc.), where API SN or earlier specifications API SM, API SL oil performance level is required

Advantages

The unique synthetic technology (PAO) ensures reliable engine operation in the most highly accelerated operating modes.



Provides reliable engine operation under forced operating mode due to durable oil film and stable viscosity



Stable friction coefficient allows oil to perform well in wet clutches



Due to use of the most oxidation-resistance components (PAO), maximum resistance of oils to active operations is achieved, including sports conditions



Excellent lubrication and anti-wear properties guarantee reliable protection of engine and integrated gearbox



Universality of application, both in sports competitions and civil use

Specifications


▪ API SN

▪ JASO MA2

Typical physical and chemical characteristics

Parameters	Value	Method
Kinematic Viscosity@100°C, mm²/s:	15,5	ASTM D 445
Viscosity Index	159	ASTM D 2270
Dynamic viscosity, CCS @ -25°C, mPa*s	6100	ASTM D 5293
Pour Point, °C	-52	ASTM D 97
Flash Point (COC), °C	247	ASTM D 92
TBN, mg/g KOH	9,4	ASTM D 2896

Advantages of the oil G-Energy Moto 4T Performance 10W-40

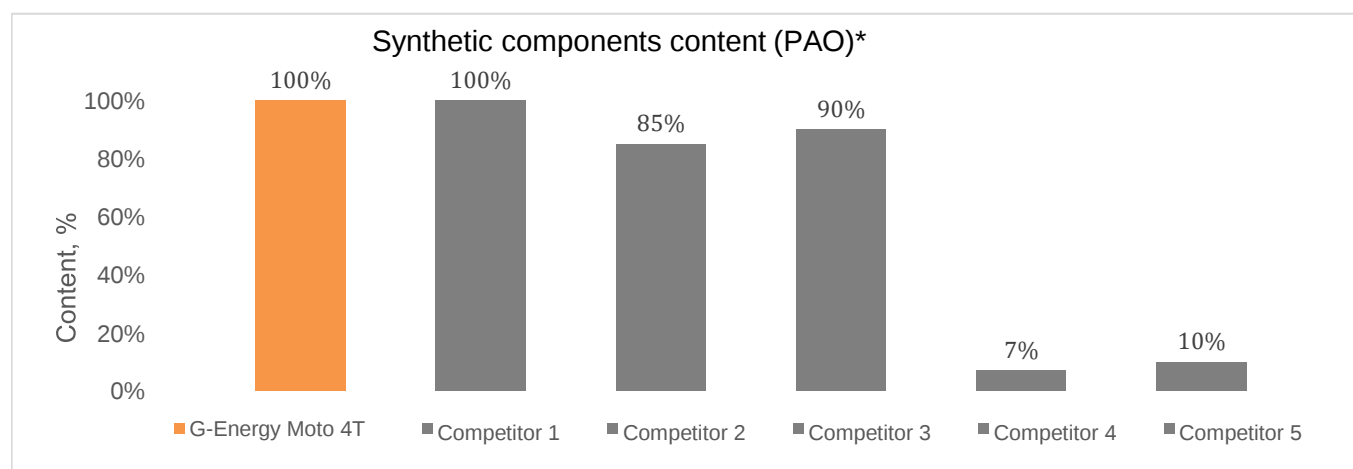

Unlike the most common foreign competitors, the formula of G-Energy Moto 4T Performance 10W-40 uses only PAO base oils.

* Based on studies of IR-Spectrum of competitor's samples

The company's management system is certified in accordance with the international

ISO 9001



ISO 14001



ISO 45001

